


Multi-Purpose Panel XXL

XXL Size for a Wide Range of Applications



- **Jumbo-size**
- **Versatile**
- **Easy to install**

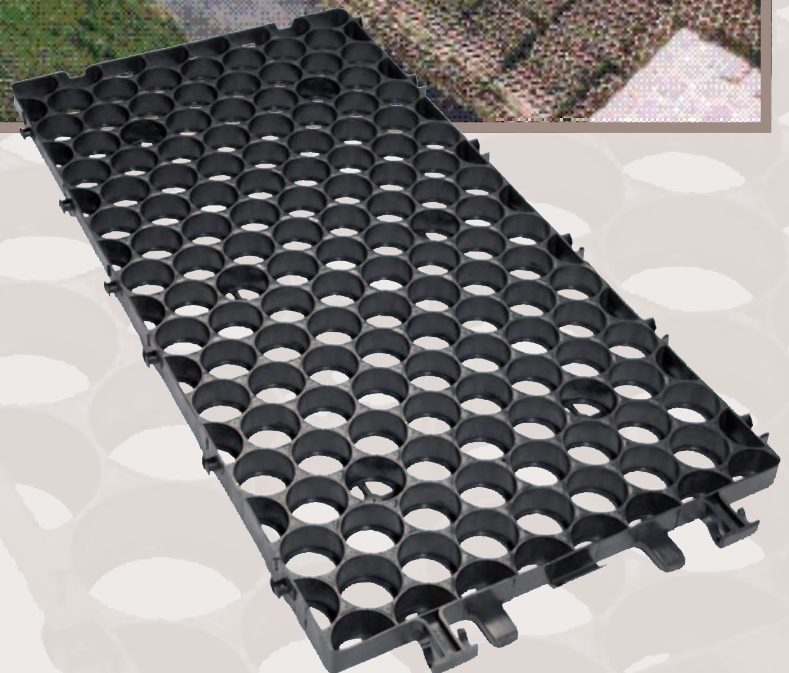

ritter
innovations in plastics

► The Multi-Purpose Panel in Detail


Advantages and Features

TECHNICAL DATA

Size (installed):	Approx. 589 x 1.156 mm (approx. 0.68 m ² per panel), Approx. height 40 mm*
Weight:	Approx. 5.6 kg per m ² *
Material:	HDPE recycling material
Colours:	Black/anthracite, on request green, beige, grey**
Load:	Approx. 2,800 kN/m ² (LGA-Bayern, PZG-6636037/1)
Installation output:	Approx. 100-140 m ² per man hour on a prepared surface
Packaging unit:	100 panels per pallet = approx. 68 m ² EURO 800 x 1,200 mm, 2,200 mm height, Pallet weight approx. 350 kg
Applications:	Large areas used as temporary car parks, landscaped roads, parking areas, outside storage space, parking areas for boats and caravans, areas used for big events, escarpment and slope reinforcement, lakeside and river bank reinforcement, erosion prevention for channels used temporarily to carry water

TECHNICAL DETAILS

The design of the panel allows for effortless and ergonomic installation. When interlocked the panels afford maximum stability.

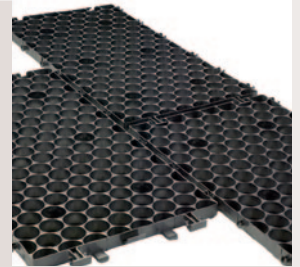

The customised connection system offers sufficient flexibility and prevents displacement caused by temperature-related changes in size.



On the long sides the panels are snapped together with special catches. The panels can be combined in 1/4 and 1/2 sections.



The tops of the panels have little conical studs providing an anti-slip texture.



ritter

innovations in plastics

Ritter GmbH
Kaufbeurer Straße 55
D-86830 Schwabmünchen
Tel.: +49 (0) 8232 / 5003-0
Fax: +49 (0) 8232 / 5003-51
E-Mail: baustoffe@ritter-online.de
Internet: www.ritter-online.de



Distributor for Australia:



Eco Animal Bedding Pty Ltd
Factory 1 / 10 Slater Parade
East Keilor Vic 3033
Phone 1300 726 406, Fax 03 8336 1184
ecoab.com.au

*Colours, weights and sizes may vary slightly owing to the use of recycled material.

** Special colours are generally made from virgin material and therefore have to be costed individually.

Our written and verbal advice in respect of specific applications is based on our experience and is given to the best of our knowledge but nevertheless constitutes a non-binding recommendation. No claims may be made arising from our statements in the event of working conditions beyond our control. We recommend checking whether the product is suitable for the intended use. We are unable to oversee the application, use and handling of the products and, as such, we accept no responsibility whatsoever for the same. Should an issue of liability arise nevertheless, then any damages shall be limited to the value of the goods. Our warranty relates to the consistent quality of our products as set out in our specifications and pursuant to our general terms and conditions of supply and payment.